INDUSTRY KITCHENS
www.industrykitchens.com.au 1800 611 058

Four Solid Swing Door BackBar

Range: BackBar
SKOPE ID: BB004
Dimensions: 2600 mm (W) × 590 mm (D) × 1025 mm (H)*
Capacity: 860 L

* Height with castors is adjustable from 1015 to 1030.

Project:

Item #:



A solid door under-bar fridge designed to merchandise ready-to-serve cold beverages and food in bars, restaurants, clubs, pubs, and cafés. With M1 compliance it is engineered to serve cold food and drinks at 1°C to 4°C (or adjustable up to 15°C) in ambient environments of up to 40°C. Made from powder-coated, galvanised steel with colour options, it can also be upgraded to full stainless-steel construction. The doors and cabinet are fitted with built-in retractable tabs to enable locking via padlock. The fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output and can be provided in remote versions. The side-mounted fully removable refrigeration cartridge (with left and right options) is front-breathing and can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to a free app to enable the user to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



2 YEAR
Warranty

Natural Refrigerant

GEMS

SKOPE-connect

© 2022 SKOPE Industries Limited | We reserve the right to alter specifications without notice.

Email: skope@skope.com AUS Freephone: 1800 121 535 NZ Freephone: 0800 947 5673 skope.com

BB.4.SSW

INDUSTRY KITCHENS
www.industrykitchens.com.au 1800 611 058

SKOPE®

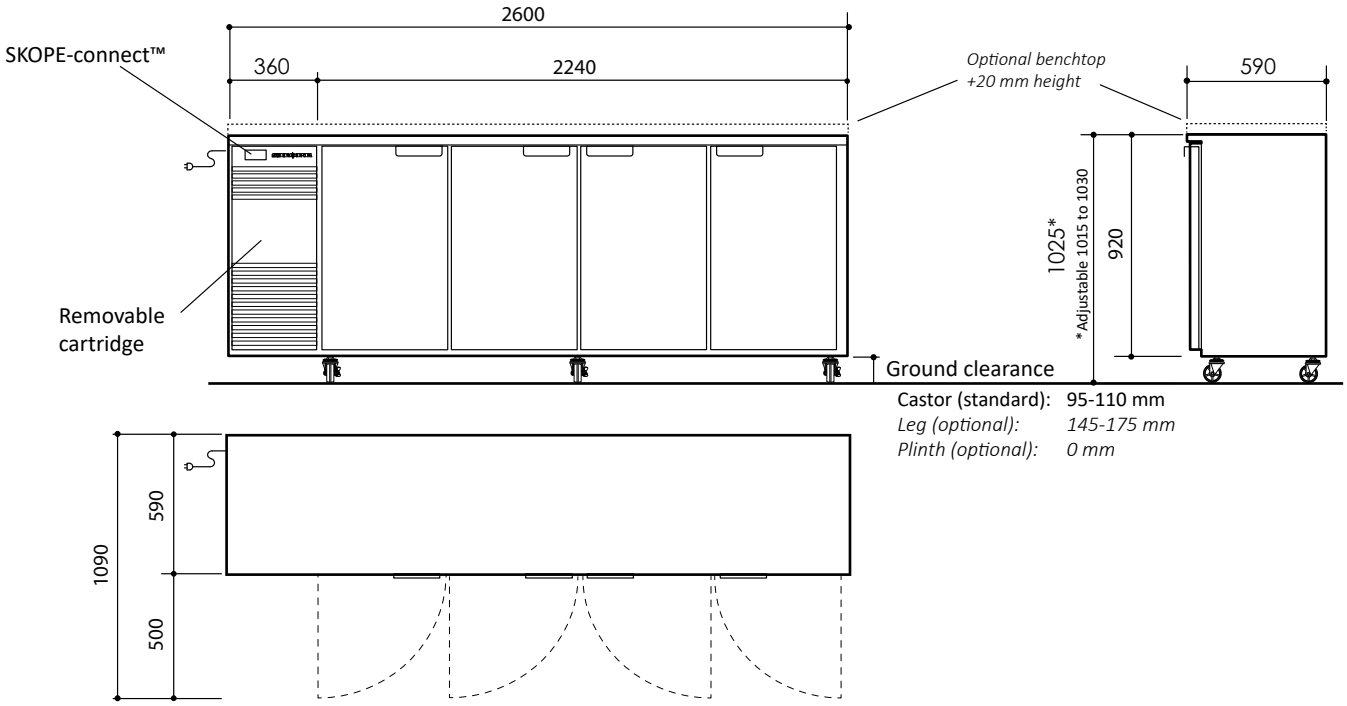

Cabinet

Type	BackBar	
Finish	Powdercoated galvanised steel or stainless steel	
Insulation	Type	PU foam
	Thickness (mm)	50
	Blowing Agent	Cyclo-iso Pentane (C5H10/C5H12)
Doors	Type	Solid swing door (self-closing, foamed, lockable)
	Opening Size	Height (mm) 730
		Width (mm) 460
Shelving	Eight adjustable height, plastic-coated wire shelves 4 × outer shelf (497W × 440L), 4 × inner shelf (555W × 440L)	
Lighting*	2 × 16 W dimmable, cool white (5500-6500K) LED strip on cabinet ceiling	

Dimensions†

	External	Internal	Packed
Width (mm)	2600	2140	TBC
Depth (mm)	590	530	TBC
Height (mm)	**1025 (std. castors)** 920 (plinth mount)	758	TBC
Weight (kg)	278		TBC
Capacity (L)	860		
Footprint (m^2)	1.53		

Ventilation (mm)

Top	Not required	**Sides**	Not required	**Rear**	Not required

Product Loading

Facing	330 ml can	60	600 ml bottle	56
Loading	330 ml can	360	600 ml bottle	336

Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from 0 to 15)	
Rated Ambient Temperature	40°C/40% relative humidity	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	Less than 66
	Hush Mode*	Less than 62

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	5
Product Temperature Class	M1 (-1 to 5°C)
Total Energy Consumption	4.03 kW h/24 h
Annual Running Costs	$441 (@ $0.30/kW h)

Electrical

Supply	220-240 volts a.c., 50 Hz, single phase supply
Cord	1.9 m power cord with 3-pin, 10 amp plug
Current draw (A)	3

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)			
System Type	Removable cartridge			
Cartridge Weight (kg)	24			
Refrigerant/Charge	R290/81 g			
Nominal Capacity (W)	850			
Heat Rejection (W)	Average	170	Peak	210
Remote Duty	n.a.			
Defrost Type	Off-cycle			
Drainage	No plumbing required			

* Accessible via the free SKOPE-connect™ app.

† Allow for dimensional tolerances when installing the cabinet(s).

BB.4.SSW
on the SKOPE website

© 2022 SKOPE Industries Limited | We reserve the right to alter specifications without notice.

Email: skope@skope.com AUS Freephone: 1800 121 535 NZ Freephone: 0800 947 5673

skope.com