
100 Series

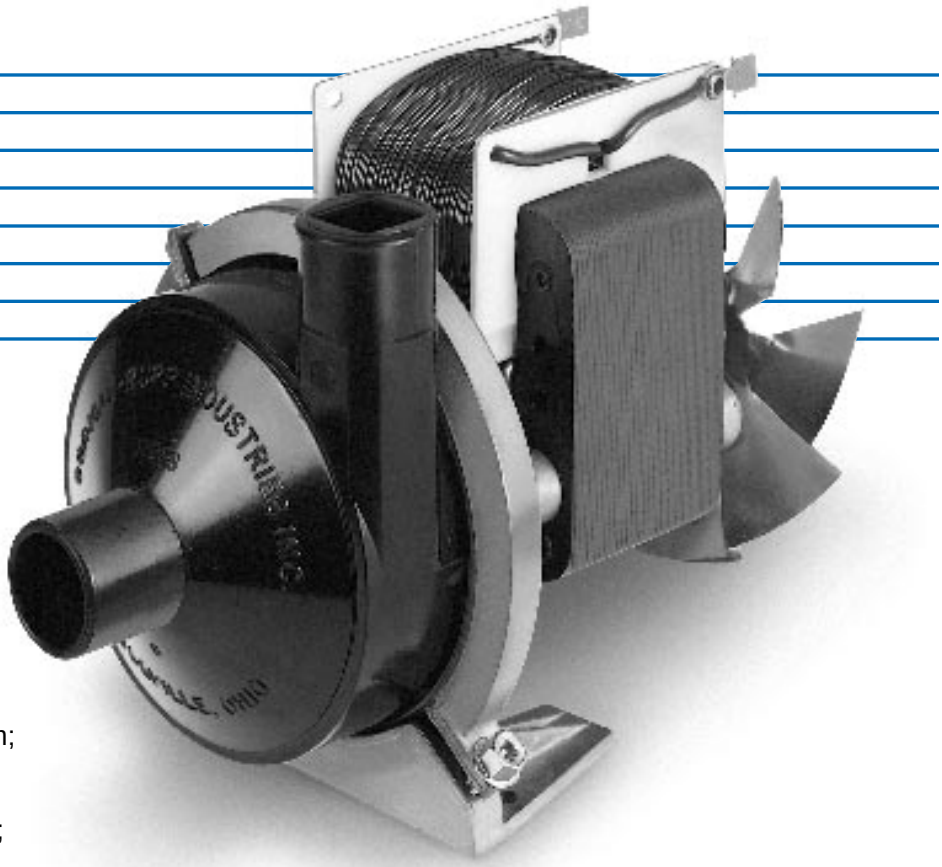

Pump Specifications:

Flow Rates — Range to 9 gpm; maximum head 14 feet

Motors — 115V, 50/60 Hz; 230V, 50/60 Hz Open, shaded pole, thermally protected, ball bearing


Fluid Temperature — To 220°F (104°C)

Materials in Contact with Solution:

Body — Suction I.D. - ½" Discharge I.D. - ½" Phenolic

Impeller — Phenolic

Seal — Carbon and Ceramic faces with Nitrile elastomers

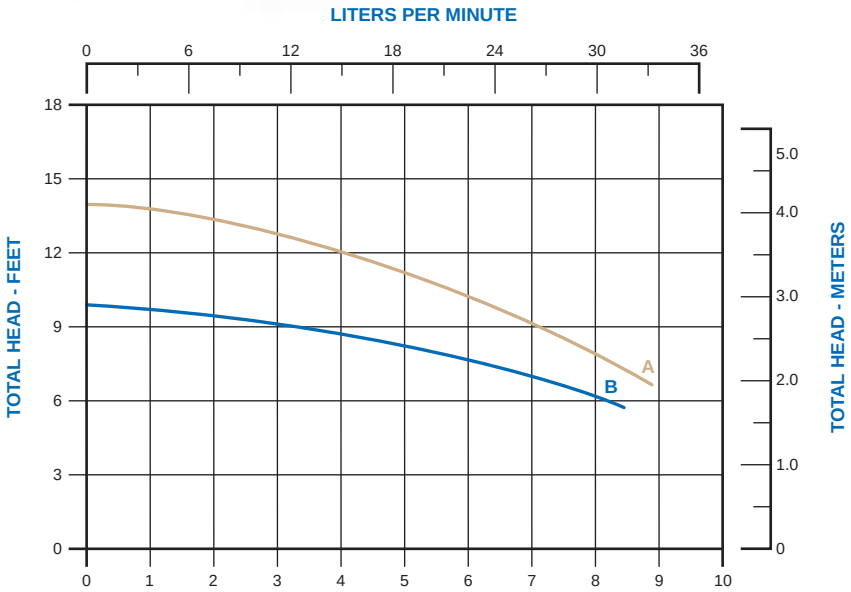


A - 60 Hz curve. **B** - 50 Hz curve.

MODEL SPECIFICATIONS

Model Number	Series	Seal	Volts	Hz	Amps	Motor Type	Shell	Typical Curve		Approx. Wt.
								50 Hz	60 Hz	
15332-006	100	Mech	115	50/60	2.4/1.8	SP	Open	B	A	3.6 lbs.
15332-008	100	Mech	230	50/60	1.2/.9	SP	Open	B	A	3.6 lbs.

©2001 Gorman-Rupp Industries


100 Series Model

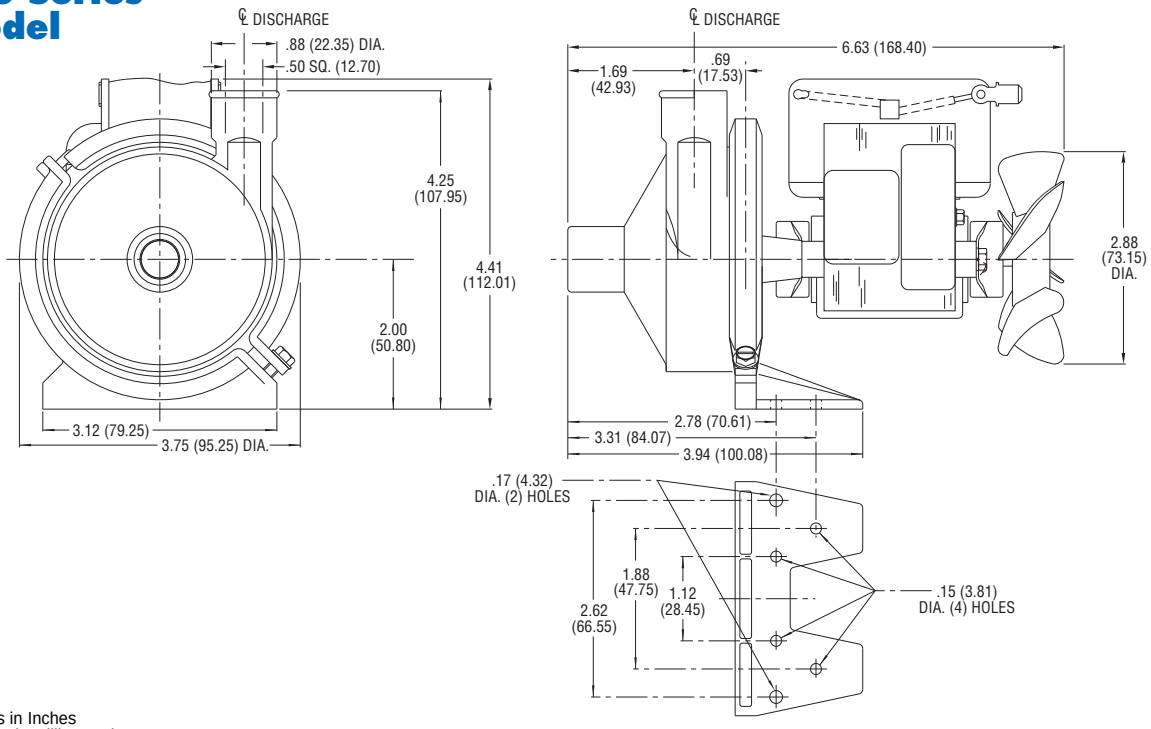

Dimensions in Inches
(Dimensions in Millimeters)

OEM Options

Impellers — Two different diameter impellers are available to provide greater performance ranges

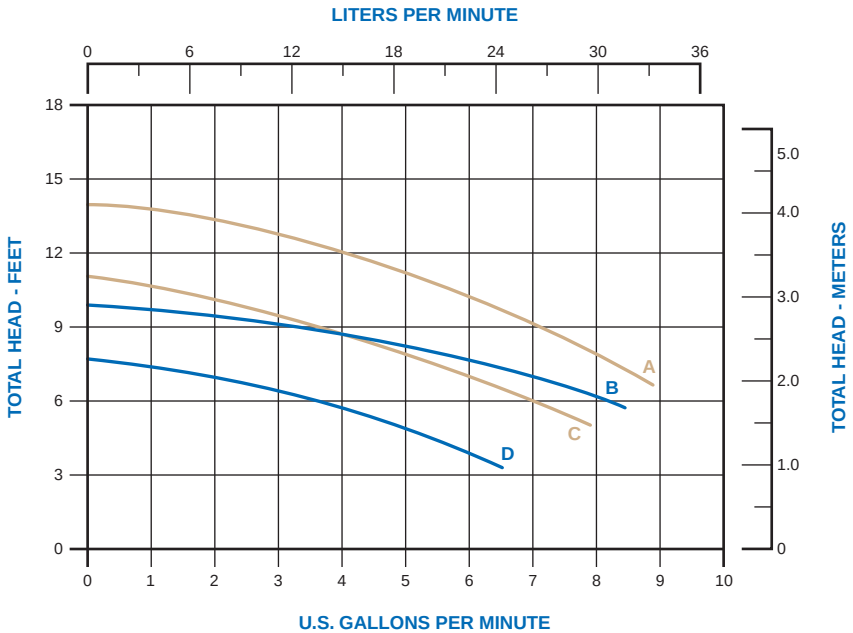

Curves **A** and **B** are with large impeller. **A** and **C** - 60 Hz curves. **B** and **D** - 50 Hz curves.

©2001 Gorman-Rupp Industries