
5600 Series

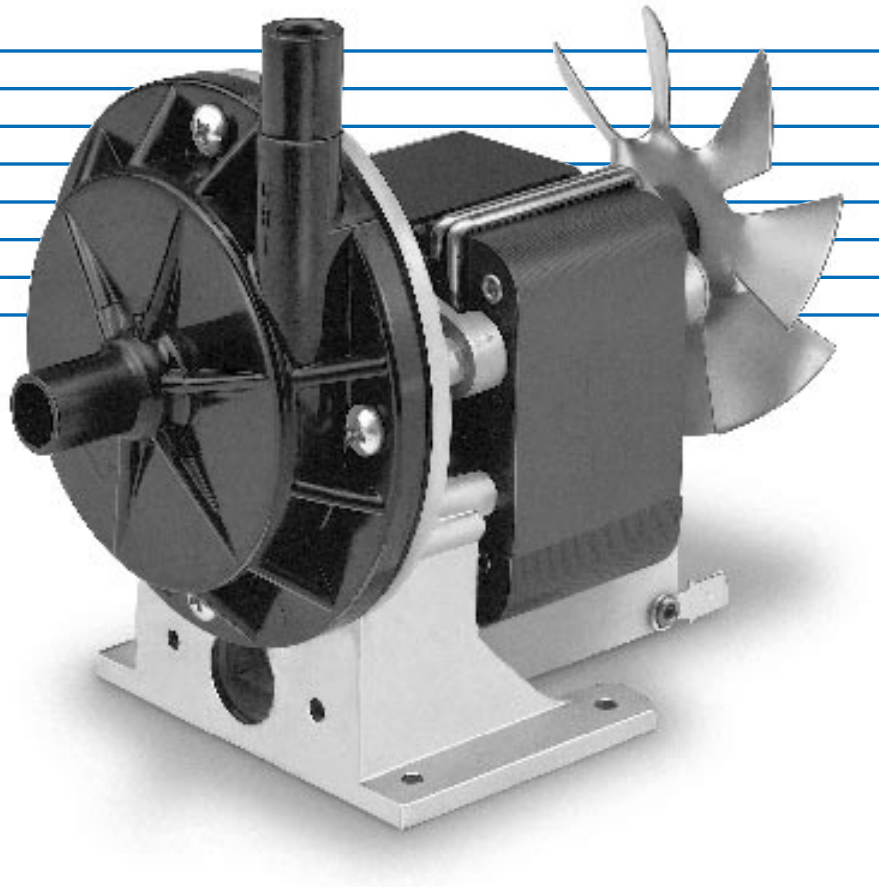

Pump Specifications:

Flow Rates — Range to 3.5 gpm; maximum head 16.9 feet

Motor — 115V, 50/60 Hz Shaded pole, thermally protected


Fluid Temperature — To 220°F (104°C)

Materials in Contact with Solution:

Body — Phenolic

Impeller — Phenolic

Seal — Carbon and 316 Stainless Steel faces with Polyethylene and Nitrile elastomers

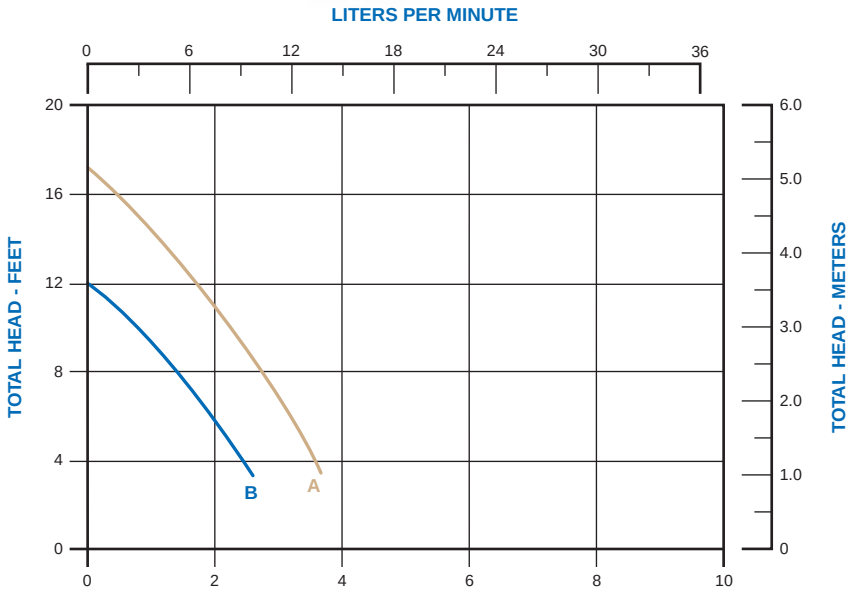


A - 60 Hz curve. **B** - 50 Hz curve.

MODEL SPECIFICATIONS

Model Number	Series	Seal	Volts	Hz	Amps	Motor Type	Shell	Typical Curve		Approx. Wt.
								50 Hz	60 Hz	
15902-001	5600	Mech	115	50/60	2.4/1.6	SP	Open	B	A	4.5 lbs.
15951-001	Same as 15902-001 except with 6' cord and cover									

©2001 Gorman-Rupp Industries

5600 Series Model

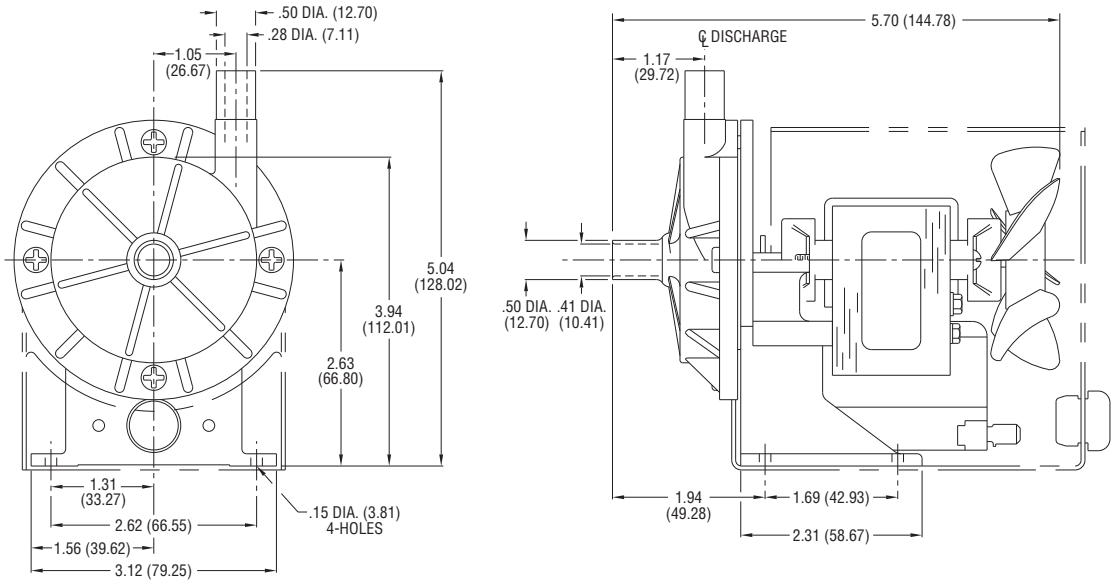

Dimensions in Inches
(Dimensions in Millimeters)

OEM Options

Impeller — Stainless Steel

Seals —
a. Buna N lip seal
b. Carbon vs. 316 Stainless Steel with Brass, 302 Stainless Steel and Kel-F® or Butyl and EPT/ EPDM elastomers

Motors —
a. 115V, 60 Hz
b. 230V, 50/60 Hz
c. 220/240V, 50 Hz

©2001 Gorman-Rupp Industries