HAYWARD®



SV Series True Union Solenoid Valves

1/4" TO 1" PVC AND CPVC

KEY FEATURES

- Available in PVC and CPVC
- Corrosion-Resistant Polyester Coil
- No Pressure Differential Required for Operation
- Both 1/2" Conduit or SJ-Type Cord Electrical Connection
- 120 VAC Standard
- Normally Closed Design

OPTIONS

- 12 VAC, 24 VAC, 220 VAC, 12 VDC, 24 VDC

OPERATING PARAMETERS

[1]For optimum valve performance, differential pressure must not exceed 90 psi.

[2]Flow velocity must not exceed 5 ft/sec

[3]Units are not to be operated 'on' continuously


[4]Maximum back pressure 25 psi.

MATERIALS

- PVC Cell Class 12454 per ASTM D1784
- CPVC Cell Class 23447 per ASTM D1784
- FPM and EPDM O-Ring Seals

TECHNICAL INFORMATION

EXPLODED VIEW

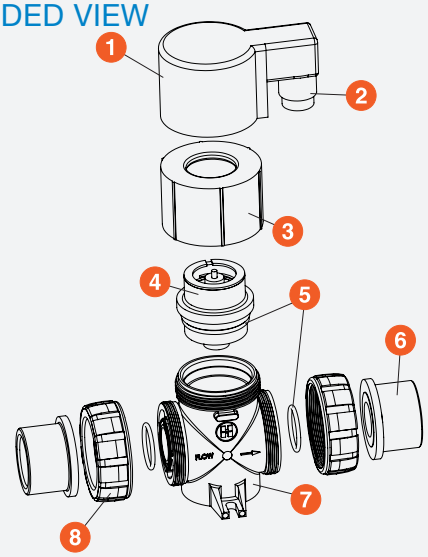

SELECTION CHART


SIZE	MATERIAL	END CONNECTION	SEALS	PRESSURE RATING
1/4" – 1" * (DN8 – DN25)	PVC or CPVC	Socket and Threaded	FPM or EPDM	150 PSI @ 70°F 10 Bar @ 21°C Non-Shock

* PVC and CPVC socket ends available to ISO 727-1 and threaded ends to BS21.
For optimum performance, differential poressure must not exceed 90 psi across the valve.

TECHNICAL INFORMATION, *CONTINUED*

PARTS LIST

1. Solenoid Coil
2. Electrical Connector
3. Bonnet Nut
4. Seal Cartridge
5. O-Rings
6. End Connector
7. Body
8. Union Nut

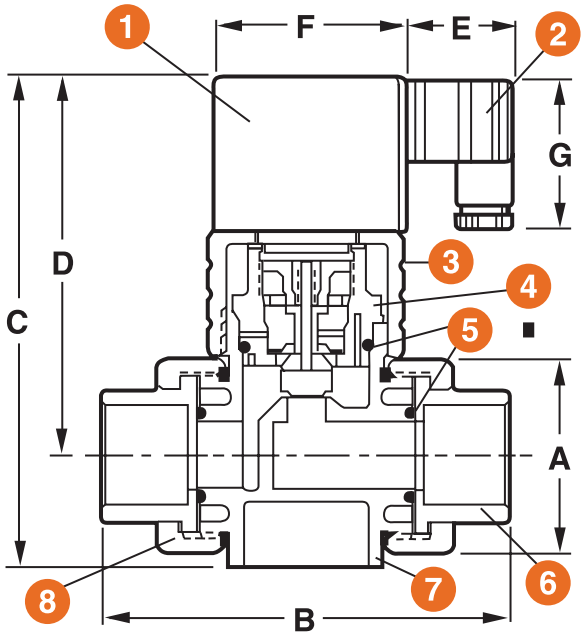

DIMENSIONS

SIZE in / DN	A in / mm	B in / mm	C in / mm	D in / mm	E in / mm	F in / mm	G in / mm	WEIGHT lbs / kg
1/4 / 8	2.25 / 57	5.30 / 135	6.30 / 160	4.60 / 117	1.60 / 41	2.60 / 66	2.00 / 51	2.79 / 1.27
1/2 / 15*	2.25 / 57	5.30 / 135	6.30 / 160	4.60 / 117	1.60 / 41	2.60 / 66	2.00 / 51	2.81 / 1.27
3/4 / 20*	2.63 / 67	5.50 / 140	6.60 / 168	5.10 / 130	1.60 / 41	2.60 / 66	2.00 / 51	3.01 / 1.37
1 / 25*	2.63 / 67	5.50 / 140	6.60 / 168	5.10 / 130	1.60 / 41	2.60 / 66	2.00 / 51	3.03 / 1.37

Dimensions are subject to change without notice – consult factory for installation information

* Metric End Connections Available In: BSP – Straight Thread, BSP TR – Tapered Thread and Metric Socket

Cv VALUES

SIZE in / DN	Cv VALUES	SIZE in / DN	Cv VALUES
1/4 / 8	1.3	3/4 / 20	3.2
1/2 / 15	2.3	1 / 25	3.8

PRESSURE LOSS CALCULATION FORMULA


$$\Delta P = \left[\frac{Q}{Cv}\right]^2$$

ΔP = Pressure Drop

Q = Flow in GPM

Cv = Flow Coefficient

OPERATING TEMPERATURE/PRESSURE

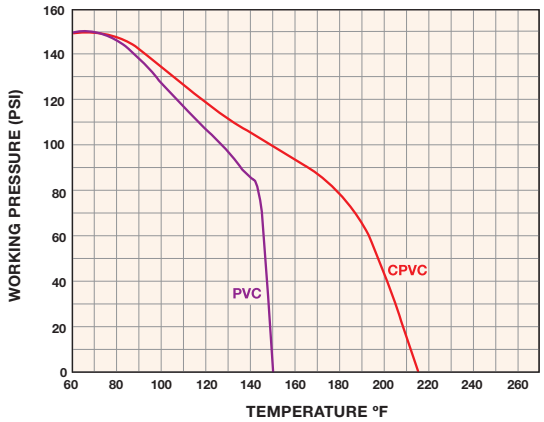

Hayward is a registered trademark of Hayward Industries, Inc.
© 2021 Hayward Industries, Inc.

USA: 1.888.429.4635 • Fax: 1.888.778.8410 • One Hayward Industrial Drive • Clemmons, NC 27012 • Email: hfcsales@hayward.com
Canada: 1.888.238.7665 • Fax: 1.905.829.3636 • 2880 Plymouth Drive • Oakville, ON L6H 5R4 • Email: hflowcanada@hayward.com
Visit us at: haywardflowcontrol.com