SUBMERSIBLE SMA3
TECHNICAL DATA SHEET



SERIES

SUBMERSIBLE CENTRIFUGAL PUMPS

Model Number: SMA3,6AM1

PERFORMANCE

CAPACITY
- 0 to 300 gallons per minute (0 to 1140 liters per minute)


SOLIDS-HANDLING
- Up to 1.5 in. (40 mm)

MAXIMUM OPERATING PRESSURE
- 100 psi (7 bar)


MATERIAL OF CONSTRUCTION
- Wetted-Aluminum
- Non-Wetted-Aluminum

PORTING
- 3" NPT

Performance based on water at ambient temperature.

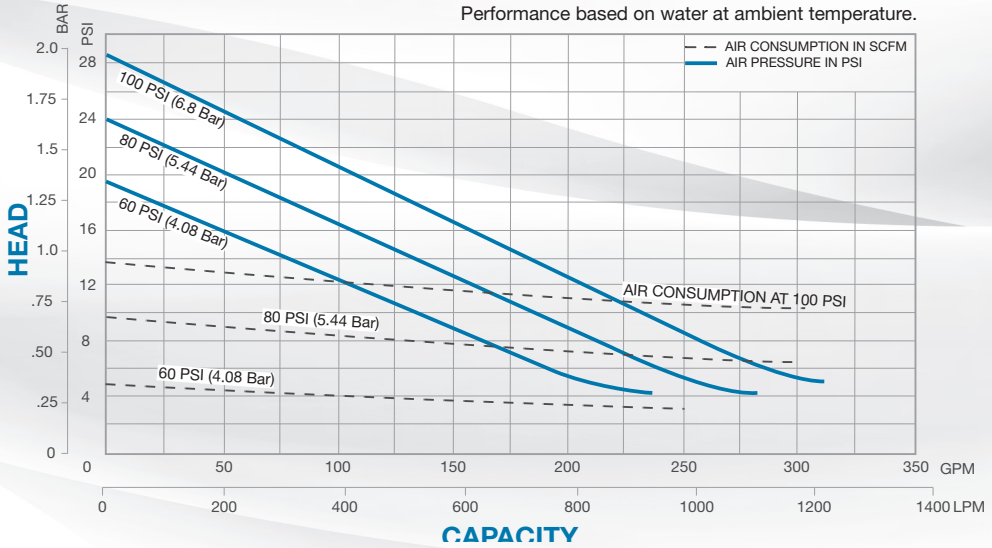

DIMENSIONS

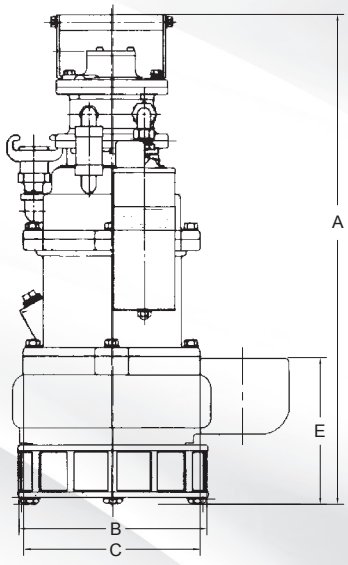

Dimensions: Tolerance ±1/8" (± 3mm)			
A	B	C	D
Height	Width	Depth	Base To Center Discharge
23.51" (597 mm)	13" (330 mm)	9" (229 mm)	7.11" (180 mm)

5 YEAR LIMITED PRODUCT WARRANTY

5 Year Guarantee for defects in material or workmanship. See sandpiperpump.com/content/warranty-certifications for complete warranty, including terms and conditions, limitations and exclusions.

USE ONLY GENUINE SANDPIPER PARTS

All certification, standards, guarantees & warranties originally supplied with this pump will be invalidated by the use of service parts not identified as "Genuine SANDPIPER Parts."

SANDPIPER®
SANDPIPERPUMP.COM
Warren Rupp, Inc. • A Unit of IDEX Corporation
800 N. Main St., Mansfield, Ohio 44902 USA
Telephone 419.524.8388 • Fax 419.522.7867