CALL TOLL FREE 877-742-2878 FOR SALES AND SUPPORT
Return to BurtProcess.com



Self Priming Trash Pump

Model EFQT, EFQU



water | wastewater | sewage | slurry

EBARA Pumps Americas Corporation

Model EFQT, EFQU

EBARA EFQ series pumps are available in a wide range of materials and sizes to handle solids and light slurries efficiently and effectively. The large volute allows for quick priming even with the casing only partially filled and an open suction line.

Features

- 3" solids handling (EFQT), 1.25" solids (EFQU)
- External shimless wear plate adjustment
- Easy removal cover plates and rotating element
- Cartridge Seals with Tungsten Carbide/Tungsten Carbide faces
- Skid Packages available:
  - Direct Drive
  - Piggy Back
  - Side-by-Side




Standard Specifications

		EFQT	EFQU
Design	Discharge	2 to 12 inch	3 to 6 inch
	Horsepower	1 to 125 HP	1.5 to 75 HP
	Capacity	3400 GPM	1500 GPM
	Total head	130 feet	210 feet
Speed		650 to 2150 RPM	
Materials	Casing	Cast Iron A48 CL 30	
	Impeller	Ductile iron A 60-40-18	
	Wear Plate	Carbon Steel SAE 1020	
	Shaft	Alloy Steel 4140	
	Mechanical Seal	TC/TC , Viton, 316 SS	
	Flap Valve	Reinforced Neoprene	


Alternate construction materials available on request including 304ss, 316ss and CD4 MCU

EFQT selection chart

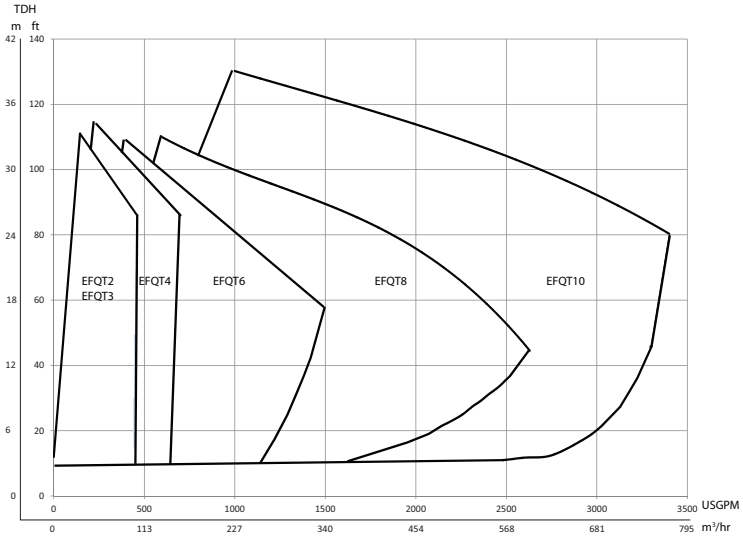

EFQT12 - Please consult Factory

EFQU selection chart

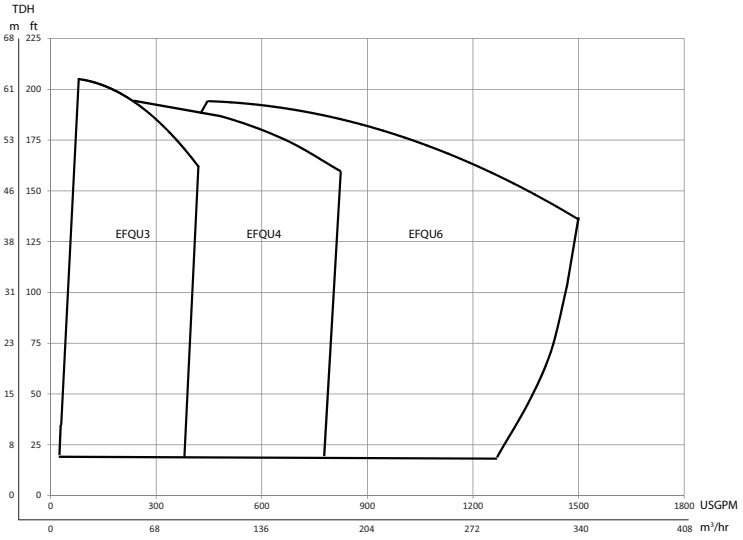

* All specifications subject to change without notice.

EBARA Pumps Americas Corporation
1651 Cedar Line Drive • Rock Hill, SC 29730 • t (803) 327 - 5005 • f (803) 327 - 5097
www.pumpsebara.com

© 2018 EBARA Pumps Americas Corporation, All rights reserved.