
CALL TOLL FREE 877-742-2878 FOR SALES AND SUPPORT
Return to BurtProcess.com

FLOMAX 35 SS

4" x 3" 316 Stainless Steel, Self-Priming, Centrifugal Pump

The 316 Stainless Steel FLOMAX® 35 provides excellent chemical compatibility and corrosion resistance for “hard-to-handle” aggressive fluids making it ideal for numerous agricultural, industrial and marine applications. The pump is equipped with a standard viton flapper, priming chamber fill-plug, and a 4” NPT Suction Flange which offers improved suction lift capabilities at the higher flow range. The discharge port is 3” ANSI 150 # Class Flat Flange. The standard mechanical seal is carbon/ceramic/viton/stainless steel. Consult factory for optional seals. Two basic PumPak styles allow the FLOMAX® 35 self-priming centrifugal pump to fit standard Nema “C” electric motor frames, engines or the standard MP pedestal. The PUMPAK is completely assembled and can be mounted to a standard motor in minutes. Applications include: AG Fertilizer transfer, Chemical transfer, Diesel Exhaust Fluid (DEF) transfer and R.O. water transfer.

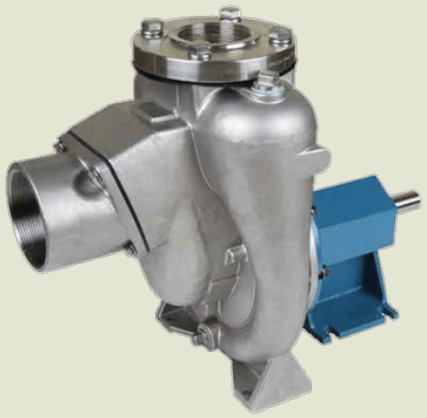


Application


- Agricultural
- Industrial
- Marine

SPECIFICATIONS:


Flow	Up to 500 GPM
Impeller	316 SS, Semi-Open, Balanced
Seal	Carbon/Ceramic/Viton
Mounting Options	PumpPak, Pedestal, Engine ,Electric Motor: -256TC -286TSC
Discharge	3" NPT 150 # Class Flat Flange

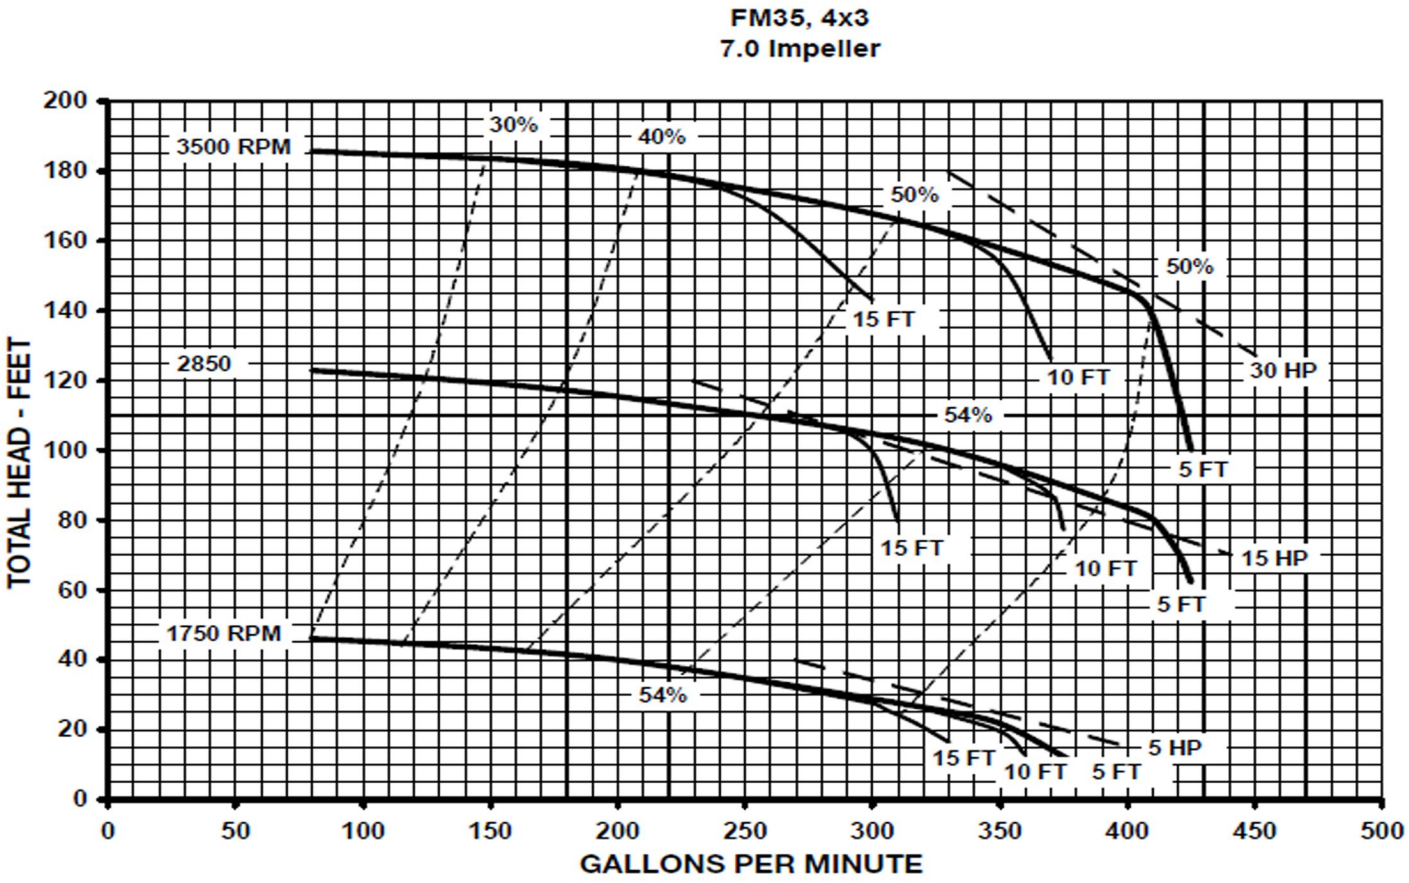


34800 BENNETT - FRASER, MI 48026-1686
(586) 293-8240 - FAX (586) 293-8469
(800) 563-8006 - www.mppumps.com

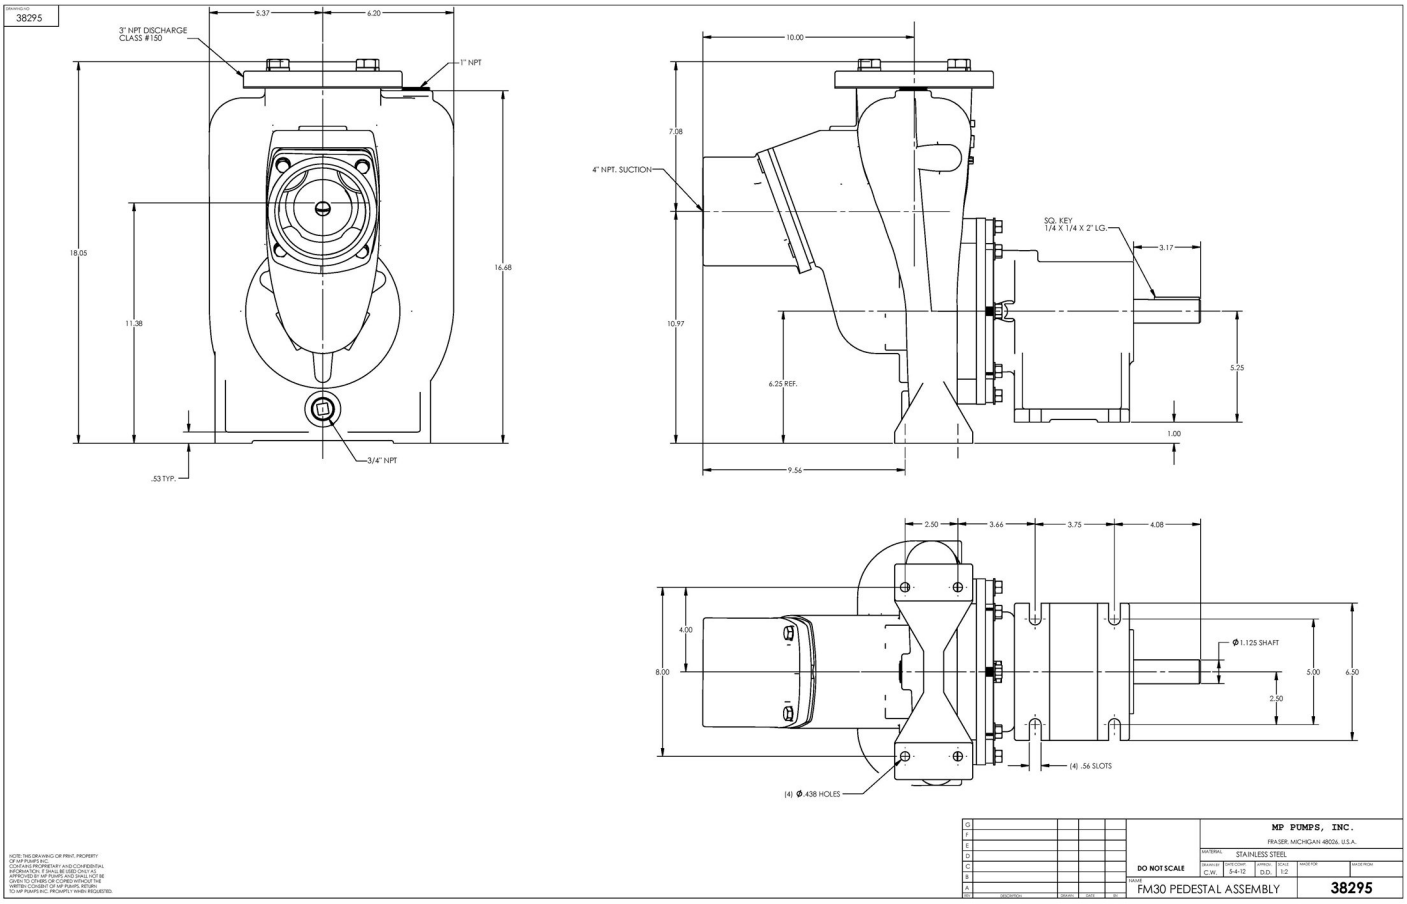

FLOMAX® 35 256TC Dimensions

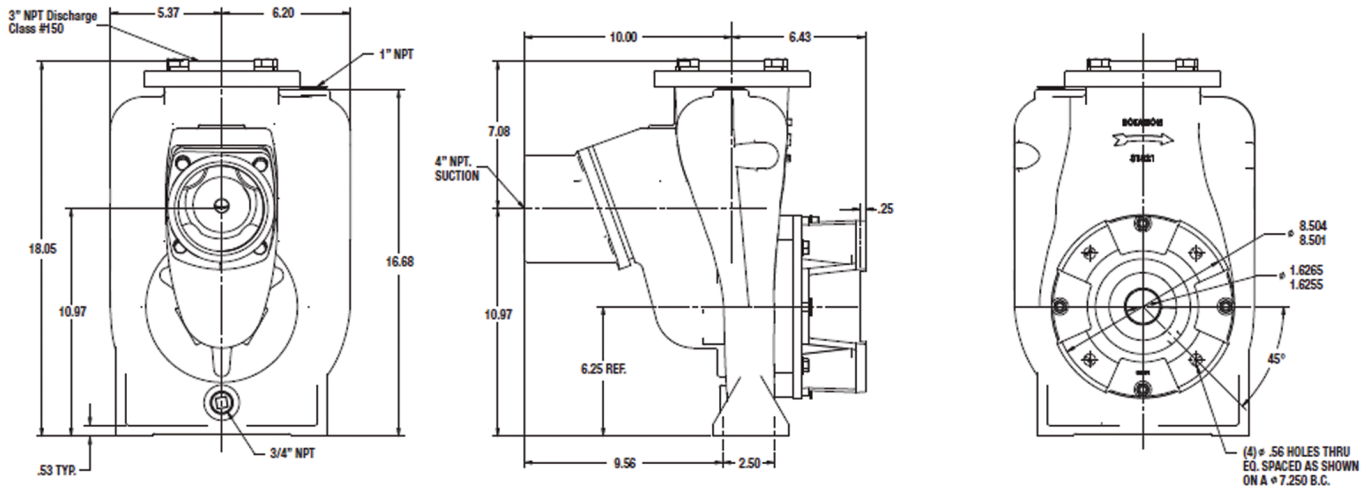

FLOMAX® 35 286TSC Dimensions

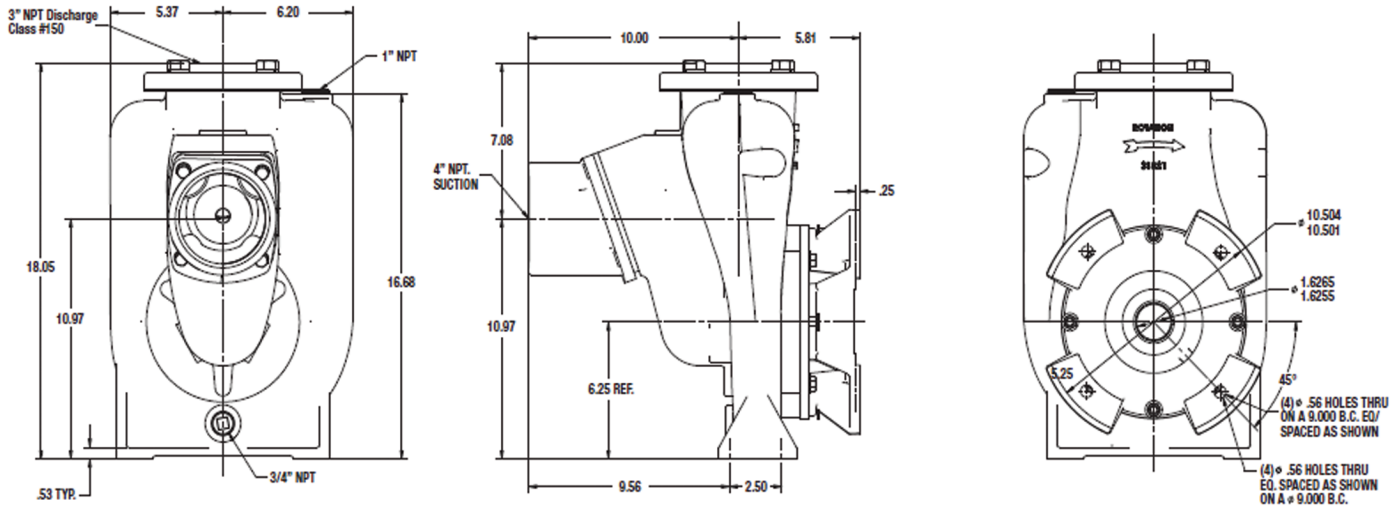

34800 BENNETT - FRASER, MI 48026-1686
(586) 293-8240 - FAX (586) 293-8469
(800) 563-8006 - www.mppumps.com