
FREEDOM SERIES - 2FFL2.6


Progressive Cavity Pump

Performance Curves

Starting Torque: 11.06 ft. lbs.
Stator Hardness = 70˚ Shore

Data Based on water @86°F

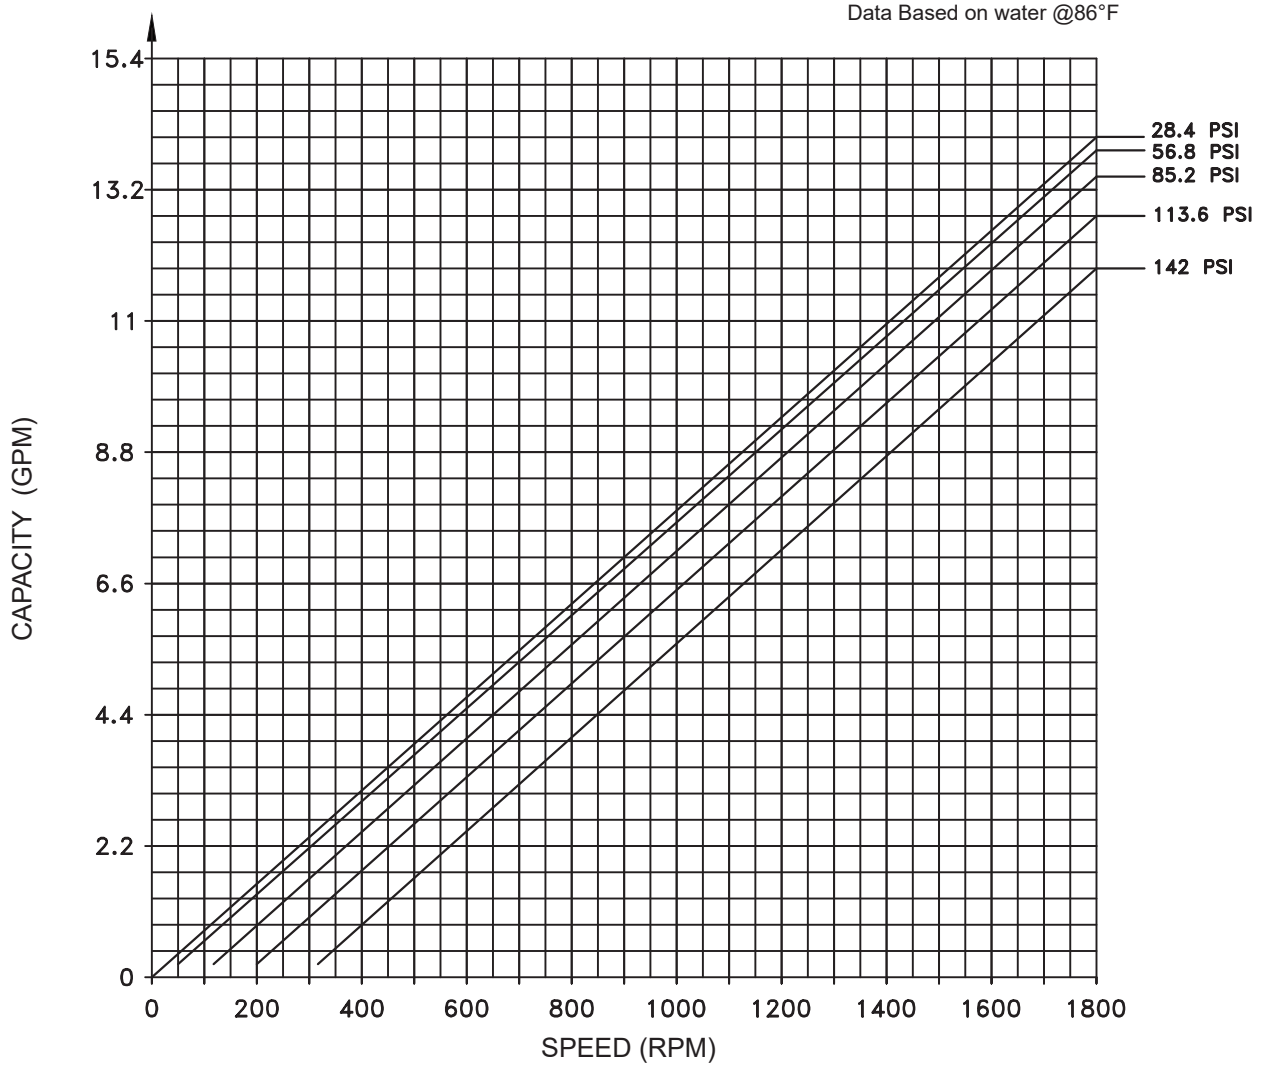

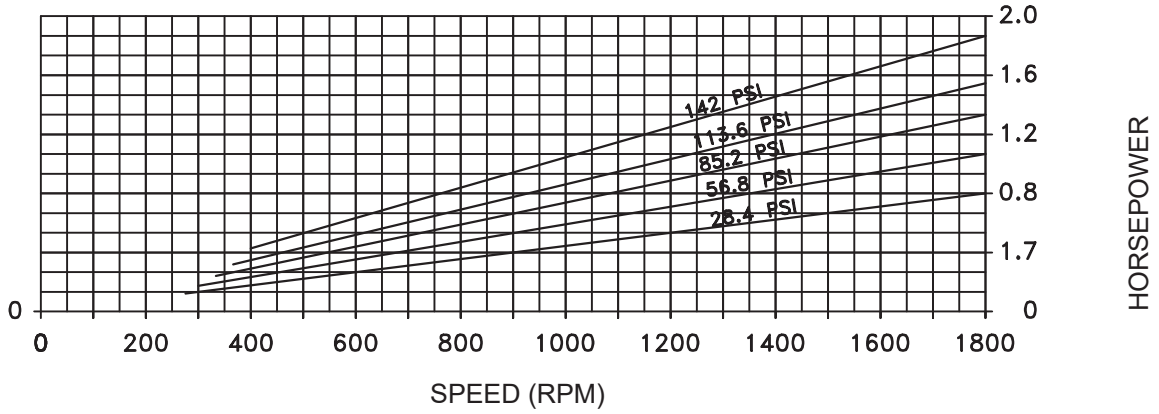

2 Stage Pump

SOLID HANDLING CAPACITY
Soft & Compressable Upto: 0.6299 inches (16 mm)
Hard & Angular Upto: 0.1575 inches (4 mm)

P: 847.640.7867 F: 847.640.7855
2525 Clearbrook Drive Arlington Heights, IL 60005