FREEDOM SERIES - 2FFL65

Progressive Cavity Pump

Performance Curves

Starting Torque: 18 Kgm
Stator Hardness = 70˚ Shore

Data Based on water @86°F

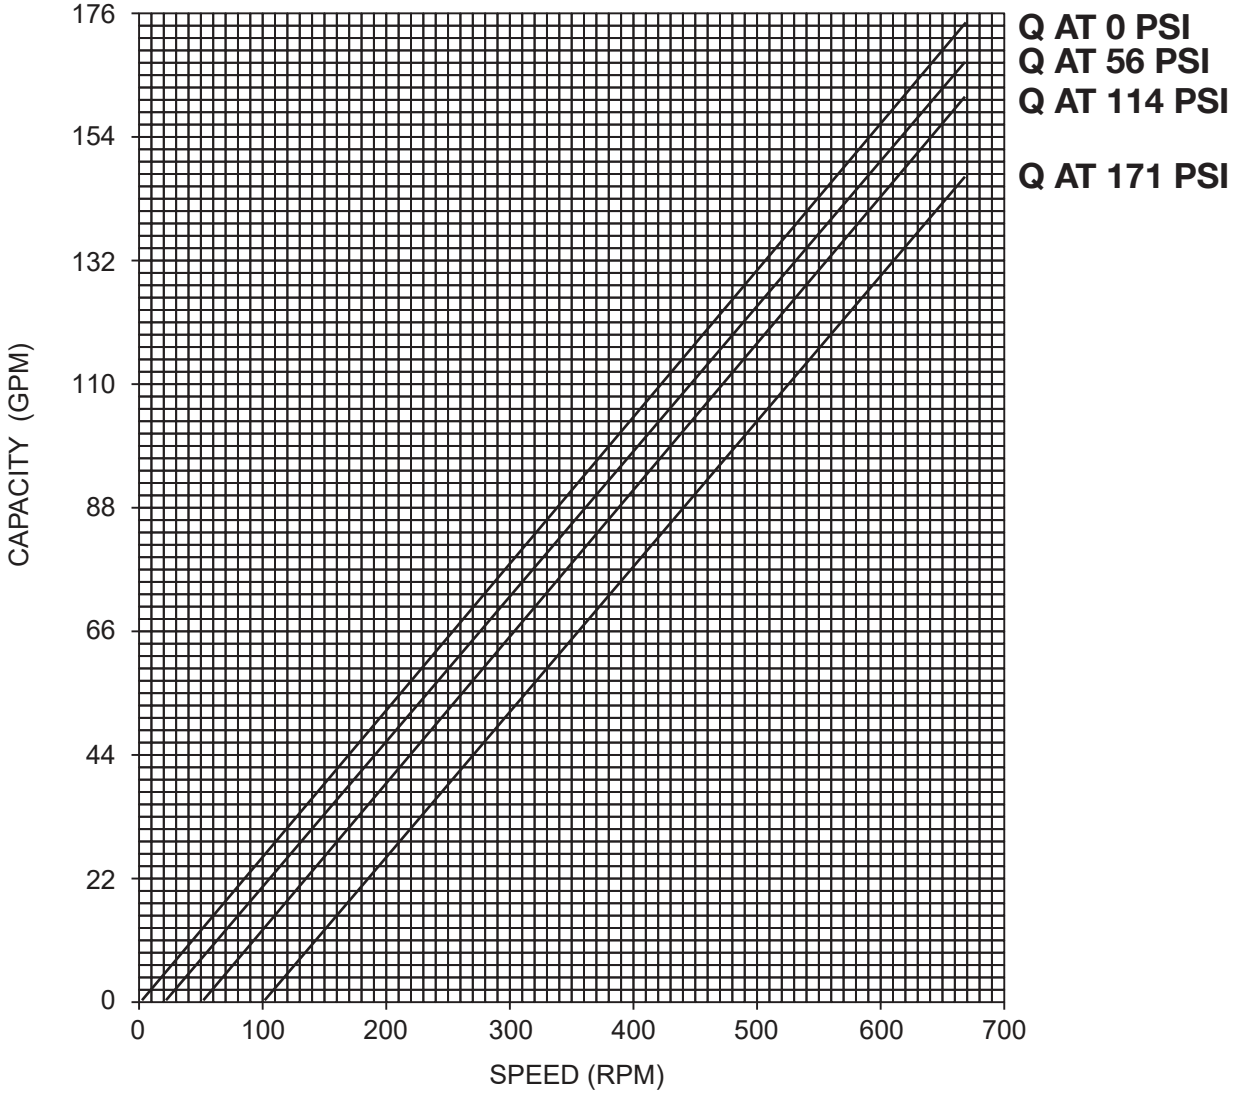

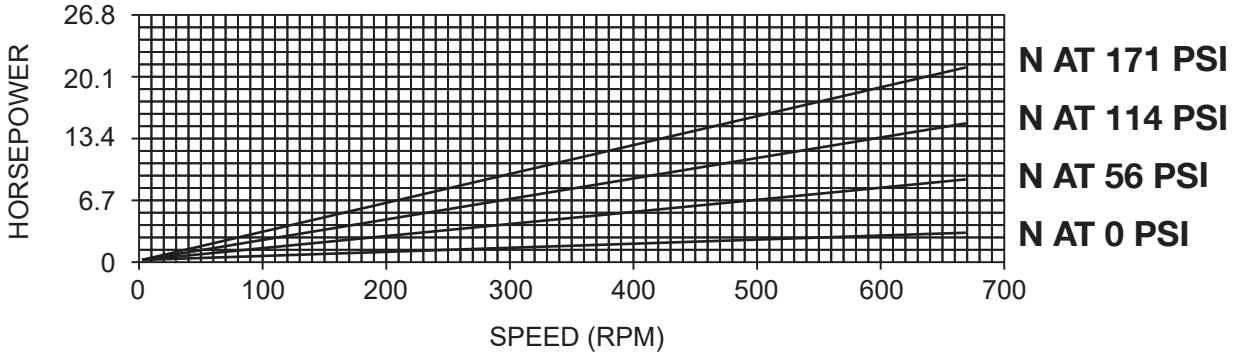

2 Stage Pump

SOLID HANDLING CAPACITY
Soft & Compressable Upto: 1.8897 inches (48 mm)
Hard & Angular Upto: 0.4724 inches (12 mm)

P: 847.640.7867 F: 847.640.7855
2525 Clearbrook Drive Arlington Heights, IL 60005