

3 YEARS PARTS & LABOR
PREMIUM
WARRANTY
5 YEAR COMPRESSOR

DUKERS
Quality Commercial Refrigeration



Front Slide Out Platform

REACH IN FREEZER

D28EF

Bottom Mounted / Solid Door



TECHNICAL SPECIFICATIONS

Voltage/Frequency	110V/60Hz
Refrigerant	R290
Type of Defrost	Automatic
Interial Material	Stainless Steel
Exterior Material	Stainless Steel
Temperature Range °F	0 ~ -8°F
Compressor Power (HP)	1/2-
Nema Config.	NEMA5-15P

PRODUCT FEATURES

- The compressor is mounted in the bottom for better heat evaporation.
- Front sliding out compressor and condenser for easy maintenance and service.
- Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- Temperatures in the cabinet range from 33 ~ 41° degrees Fahrenheit.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Epoxy coated wire shelves.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- High quality coated stainless adjustable shelves prevent peel and rust.
- Adjustable front locking casters.
- Hinged glass doors, tempered glass, UV blocking.
- Lifetime warranty on hinges.
- Equipped with Locking Doors.

HIGH QUALITY STAINLESS STEEL & ROBUST DESIGN

DUKERS
Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628
info@dukersusa.com
www.DukersUSA.com

DETAILS & SPECIFICATIONS

D28EF

Front View

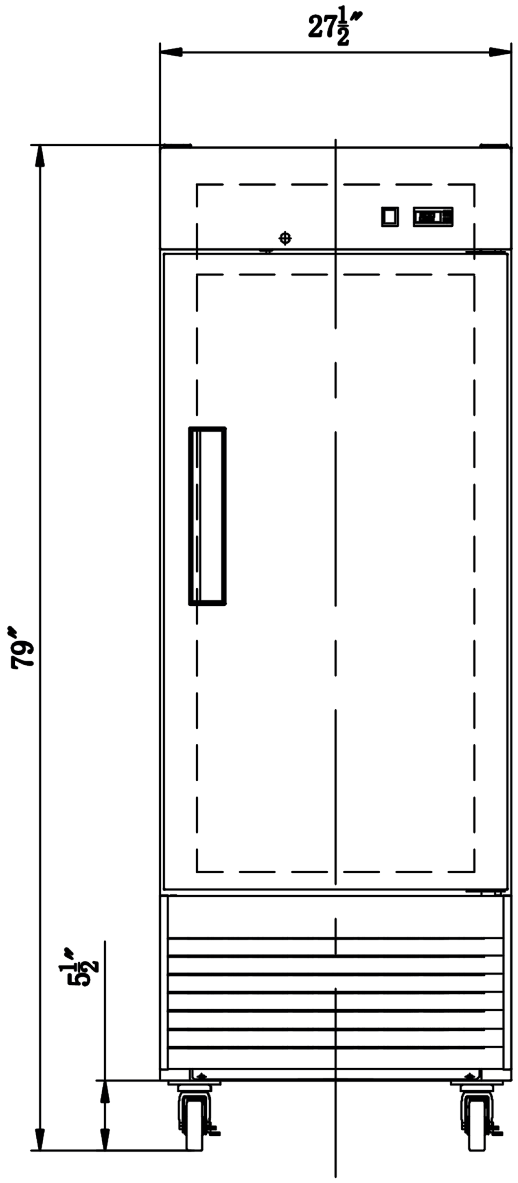

Side View

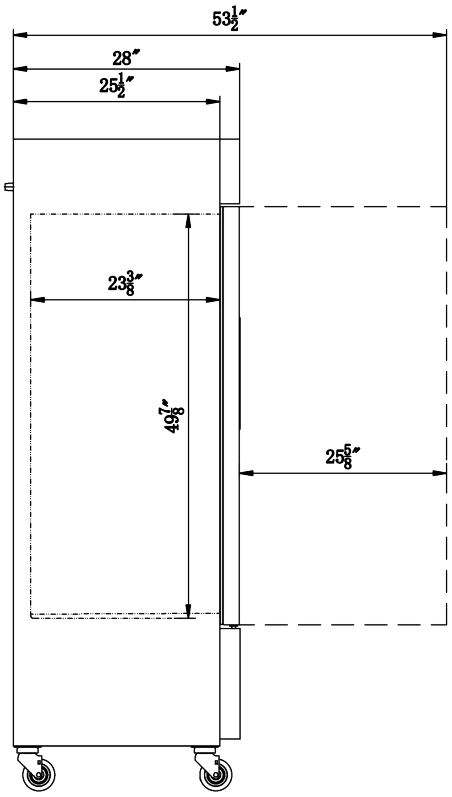

MODEL D28EF	
Rated Voltage	110V
Rated Frequency	60Hz
Total Capacity	15.94 cu ft
Insulation Blowing Gas	C-Pentane
Refrigerant	R290

MODEL	EXTERNAL DIMENSION WXDXH (INCHES)	PACKAGING DIMENSION WXDXH (INCHES)	PRODUCT NET WEIGHT	# OF SHELVES	40HQ CONTAINER CERT.
D28EF	27 1/2 x 28 x 79	29 1/8 x 30 x 83	220 lbs	3	48

NATURAL REFRIGERANT

PROUD MEMBER CFESA Commercial Food Equipment Service Association

AQ AutoQuotes

c ETL LISTED us Intertek

ETL SANITATION LISTED Intertek

115/60/1 NEMA-5-15P

DUKERS

Los Angeles | San Francisco | Dallas
Houston | Florida | Chicago | New Jersey

1-800-931-8628

info@dukersusa.com

www.DukersUSA.com